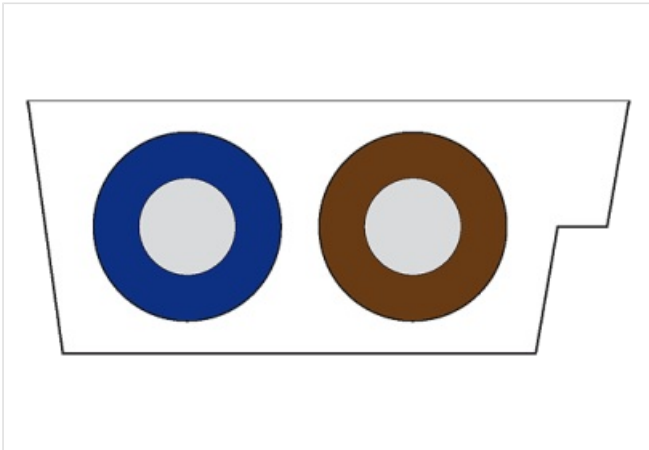


**cable drum MASI Ø 500mm**

PUR profile cable 2x1.5 ye 500m

PUR (UL/CSA)  
2× 1.5 mm<sup>2</sup>  
suitable for C-tracks  
5 Mio.

**[Link to Product](#)****Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27062011
ECLASS-7.0	27062011
ECLASS-8.0	27062011
ECLASS-9.0	27062011
ETIM-5.0	EC001578
customs tariff number	85444993
GTIN	4048879565776
Packaging unit	1

**Installation | Cable**

Cable identification	166
Jacket Color	yellow
wire arrangement	brown, blue
Travel speed (C-track)	5 Mio.
Material jacket	PUR
Material wire insulation	PP
Amount wires	2
Conductor crosssection (wire)	1,5 mm <sup>2</sup>
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	18 A
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C
Operating temperature min. (dynamic)	-20 °C
Operating temperature max. (dynamic)	80 °C
Flame resistance	UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090
chemical resistance	Good, application-related testing

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-06-21

Murrelektronik GmbH | Office Park 4, 4.OG/Top A.45 | 1300 Wien-Flughafen | Fon +43 1 706 45 25-0 | Fax +43 1 706 45 25-300 | shop@murrelektronik.at | shop.murrelektronik.at

Gasoline resistance	Good, application-related testing
Oil resistance	DIN EN 60811-404   Good, application-related testing
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	7,5 x Outer diameter