MOTOR SUPPRESSOR

RC, 3x400VAC/4kW

Art.No.: 23020
Weight: 0,114 kg
Country of origin: CZ
Model designation: RC 3/022-400 U - PG 9

3× 400 V AC
RC
PG9
Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.
For DIN-rail mounting use 2×Art.-No. 20900 adapter feet
approx. 500 mm, PVC cable 3× 0.75 mm²

Link to Product

Illustration

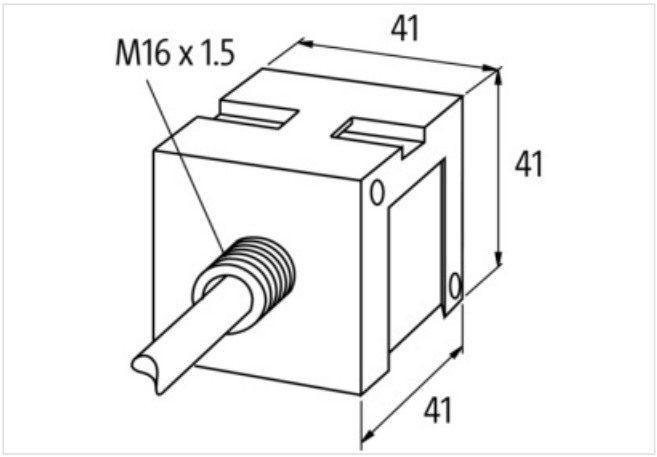

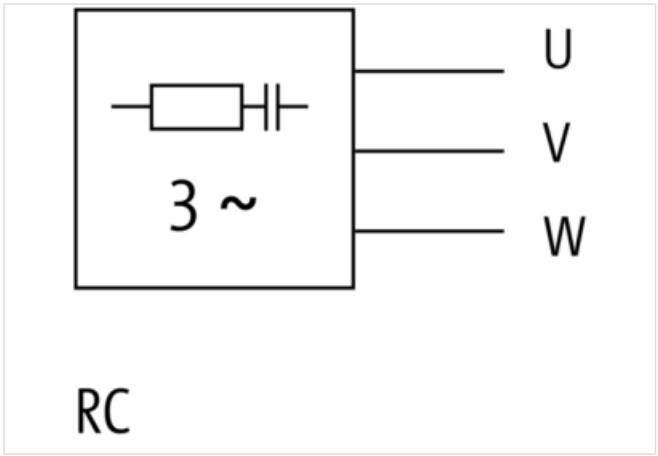

Product may differ from Image

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-09-10

URL Webshop	https://shop.murrelektronik.com/23020
GTIN	4048879019514
EU-Customs tariff number	85363010
US-Customs tariff number	8536308000
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-7.1	27371013
ECLASS-8.0	27371013
ECLASS-8.1	27371013
ECLASS-9.0	27371013
ECLASS-9.1	27371013
ECLASS-10.0.1	27371013
ECLASS-10.1	27371013
ECLASS-11.0	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013
ECLASS-13.0	27371013
ECLASS-14.0	27371013
ETIM-5.0	EC000683
ETIM-6.0	EC000683
ETIM-7.0	EC000683
ETIM-8.0	EC000683
ETIM-9.0	EC000683
ETIM-10.0	EC000683
customs tariff number	85363010
EAN	4048879019514
Packaging unit	1
Electrical data | Supply	
Power frequency	50 ... 60 Hz
Electrical data | Input	
Input voltage AC	400 V
Installation	
Connection cross section max.	0,75 mm²
Installation | Connection	
Family construction form	free cable end
Installation | Pin assignment	
No. of poles	3
Device protection | Media	
Flame resistance	flame retardant
Mechanical data | Material data	
housing	Plastic
Combustibility class housing (UL94)	V-0
Material potting compound	2-component epoxy
Mechanical data | Mounting data	
Height	41 mm
Width	41 mm
Depth	41 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics | Climatic	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-09-10

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-09-10