

6 TX managed switch with Gigabit

+ 4 power M12 IP67

6-port managed IP 67 gigabit switch, 4 power ports

6 Gigabit ports

4 power ports, A-coded


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration



Product may differ from Image

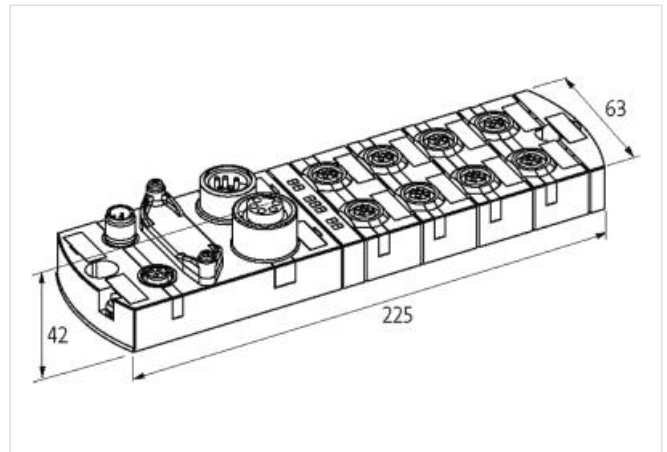

Technical Data

Operating voltage	18...28 V
Transfer rate	10/100/1000/2500 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	2-hole screw mounting
Temperature range	-25 °C ... +45 °C
Housing	Metal
Protection	IP67
Dimensions H×W×D	225×63×42 mm

Diagnostic

Communication status	via LED, LLDP
Monitoring - no voltage	yes

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN

Webserver	HTTP, HTTPS
Switch Form	Unmanaged Switch
Connections	
Fieldbus	6 × M12 (female connector), x-coded 2 × 2500 Mbit, 4 × 1000 Mbit
Supply	2 × M12 power, 4-pin, L-coded, 2 × max. 16 A // 4 × M12A female connector 5-pin