

**EUROCARD HOLDER**



SKT 31

Screw terminals  
31-pole (DIN 41617)  
all

The D2 size is for a card without a front plate.  
To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

[Link to Product](#)

**Illustration**

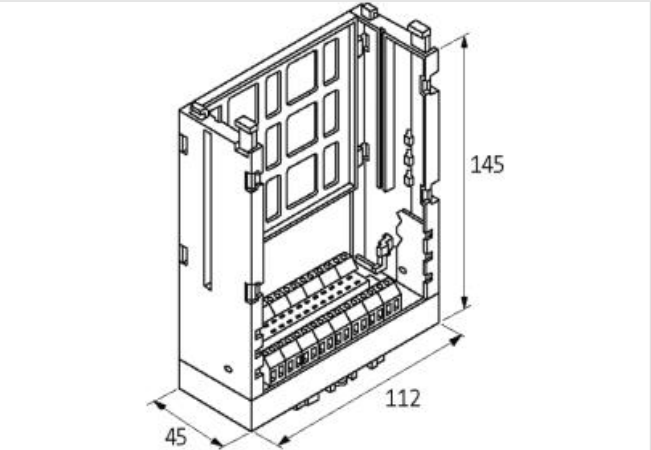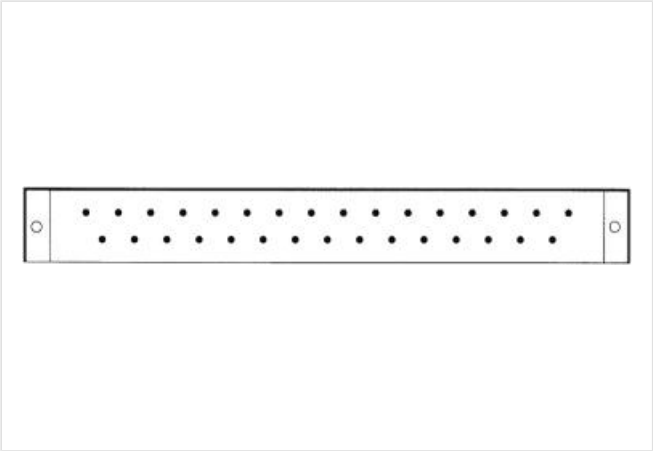

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27260710 |
| ECLASS-6.1      | 27260704 |
| ECLASS-7.0      | 27440402 |
| ECLASS-8.0      | 27440402 |

|                       |               |
|-----------------------|---------------|
| ECLASS-9.0            | 27460201      |
| ECLASS-10.1           | 27440402      |
| ECLASS-11.1           | 27460201      |
| ECLASS-12.0           | 27460201      |
| ETIM-5.0              | EC002780      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879042024 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 250 V |
| Operating current max. | 5 A   |

#### Installation

|                                     |                   |
|-------------------------------------|-------------------|
| Connection cross-section solid max. | 4 mm <sup>2</sup> |
|-------------------------------------|-------------------|

#### Installation | Pin assignment

|              |    |
|--------------|----|
| No. of poles | 31 |
|--------------|----|

#### Device protection | Electrical

|                                   |   |
|-----------------------------------|---|
| Overvoltage category (EN 60664-1) | I |
|-----------------------------------|---|

#### Device protection | Media

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

#### Mechanical data

|                          |           |
|--------------------------|-----------|
| Type of socket connector | DIN 41617 |
|--------------------------|-----------|

#### Mechanical data | Material data

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

#### Mechanical data | Mounting data

|                            |   |
|----------------------------|---|
| Mounting method            | screwed, geschnappt                             |
| Suitable for mounting type | horizontal, vertical, mounting rail, (EN 60715) |
| Height                     | 112 mm  |
| Width                      | 45 mm   |
| Depth                      | 145 mm  |