




Reset button with 2 illuminated push buttons

Every 1 NO contact in a IP65 enclosure

R-Button / 42 2NO L M12(8)
with M12 connection
8-pole
2 buttons can be lit (each 1 NO contact)
Delivery contents:
Flat lens, transparent clear, red, yellow, green, blue
Label plates, O, I, R, ↑, ↓
mounting with clip on the back side

Link to Product

Illustration

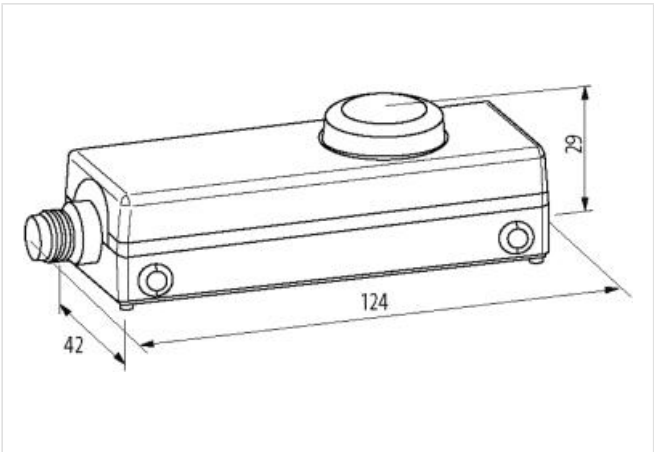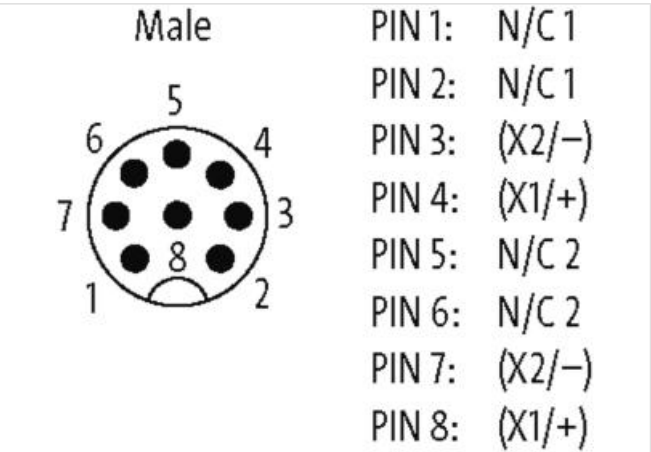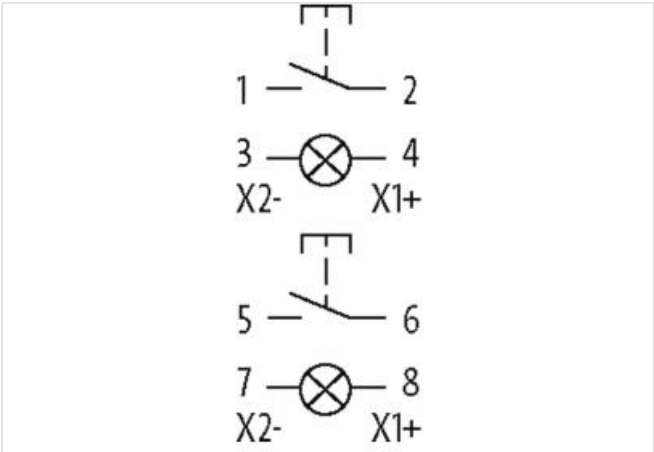

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371228 |
| ECLASS-6.1 | 27371228 |

| | |
|-----------------------|---------------|
| ECLASS-7.0 | 27371228 |
| ECLASS-8.0 | 27371228 |
| ECLASS-9.0 | 27371228 |
| ECLASS-10.1 | 27371228 |
| ECLASS-11.1 | 27371228 |
| ECLASS-12.0 | 27371228 |
| ETIM-5.0 | EC000225 |
| customs tariff number | 85365080 |
| GTIN | 4048879594325 |
| Packaging unit | 1 |

Electrical data

| | |
|---|----------------|
| Operating voltage AC/DC LED illumination max. | 30 V |
| Operating current LED illumination | 14 mA @24 V DC |

Electrical data | Supply

| | |
|--------------------------------------|-------|
| Operating voltage DC min. | 1 V |
| Operating voltage DC max. | 36 V |
| Operating voltage DC (UL Recognized) | 30 V |
| Operating current | 1,5 A |

Device protection

| | |
|--------------------|---------------------------------------|
| Condition lifetime | load-dependent, temperature dependent |
|--------------------|---------------------------------------|

Device protection | Electrical

| | |
|-------------------------------------|----------------|
| Degree of protection (EN IEC 60529) | IP65 |
| Electrical lifetime | 1000000 Cycles |

Device protection | Mechanical

| | |
|----------------------|----------------|
| Mechanical endurance | 1000000 Cycles |
|----------------------|----------------|

Mechanical data

| | |
|------------------|-------|
| Bounce time max. | 10 ms |
|------------------|-------|

Mechanical data | Material data

| | |
|------------------|------|
| Material contact | AgNi |
|------------------|------|

Mechanical data | Mounting data

| | |
|--------|--------|
| Height | 29 mm |
| Width | 124 mm |
| Depth | 42 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -25 °C |
| Storage temperature max. | 85 °C |

Connection type 1

| | |
|--------------------------|-------|
| Family construction form | M12 |
| Gender | male |
| Color contact carrier | black |
| Coding | A |
| No. of poles | 8 |
| PIN 1 | NO 1 |
| PIN 2 | NO 1 |
| PIN 3 | X 2 - |
| PIN 4 | X 1 + |
| PIN 5 | NO 2 |

| | |
|-------|-------|
| PIN 6 | NO 2 |
| PIN 7 | X 2 - |
| PIN 8 | X 1 + |