

LED-INDICATOR OPAC / GREEN

LED-230VAC IP65


(green)  
230 V AC  
The modules are suitable for wall thickness of 1.5...5.0 mm.

Link to Product

Illustration



Product may differ from Image

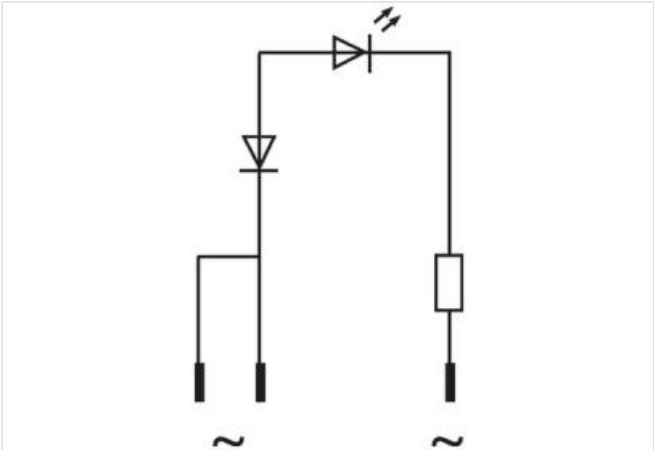

| Commercial data                     |                   |
|-------------------------------------|-------------------|
| ECLASS-6.0                          | 27261590          |
| ECLASS-6.1                          | 27261501          |
| ECLASS-7.0                          | 27261501          |
| ECLASS-8.0                          | 27261501          |
| ECLASS-9.0                          | 27261501          |
| ECLASS-10.1                         | 27261501          |
| ECLASS-11.1                         | 27261501          |
| ECLASS-12.0                         | 27261501          |
| ETIM-5.0                            | EC000272          |
| customs tariff number               | 85318070          |
| GTIN                                | 4048879041256     |
| Packaging unit                      | 10                |
| Electrical data   Supply            |                   |
| Operating voltage AC                | 230 V             |
| Operating voltage AC min.           | 207 V             |
| Operating voltage AC max.           | 253 V             |
| Current consumption min.            | 8 mA              |
| Current consumption max.            | 12 mA             |
| Installation   Connection           |                   |
| Connection information              | Faston 2.8×0.8 mm |
| Device protection   Electrical      |                   |
| Degree of protection (EN IEC 60529) | IP65              |
| Device protection   Media           |                   |
| Flame resistance                    | flame retardant   |
| Mechanical data                     |                   |

Diameter LED 5 mm

**Mechanical data | Material data**

Material housing Plastic

**Mechanical data | Mounting data**

Diameter front panel drilling 9 mm

**Environmental characteristics | Climatic**

Operating temperature min. -20 °C

Operating temperature max. 50 °C