

## LED-display 24V DC twocolored red/yellow


Product discontinued, no alternative


(red/yellow) 24 V DC Protection IP40

## **Link to Product**

## Illustration



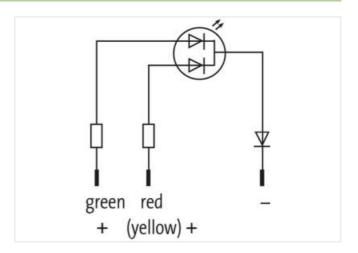



Product may differ from Image

Commercial data		
ECLASS-6.0	27261590	
ECLASS-7.0	27261590	
ECLASS-8.0	27261590	
ECLASS-9.0	27261590	
ETIM-5.0	EC000272	
customs tariff number	85318070	
GTIN	4048879040839	
Packaging unit	10	
Electrical data   Supply		
Operating voltage DC	24 V	
Operating voltage DC min.	20,4 V	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-27



stay connected
----------------

Operating voltage DC max.	26,4 V	
Current consumption min.	13 mA	
Current consumption max.	17 mA	
Installation   Connection		
Connection information	Faston 2.8×0.8 mm	
Device protection   Electrical		
Degree of protection (EN IEC 60529)	IP40	
Mechanical data		
Diameter LED	5 mm	
Mechanical data   Material data		
Color housing	gray	
Material housing	PVC	
Mechanical data   Mounting data		
Diameter front panel drilling	8 mm	
Height	18,5 mm	
Width	12 mm	
Depth	53 mm	
Environmental characteristics   Climatic		
Operating temperature min.	-40 °C	
Operating temperature max.	70 °C	