



**EMC-SUPPRESSORS FOR VALVE PLUG**

Diode and LED, 24VDC/60VA/W

24 V AC/DC  
Diode + LED (green)  
Remove plug gasket when fitting adapter. Other LED colors on request.

[Link to Product](#)

Illustration

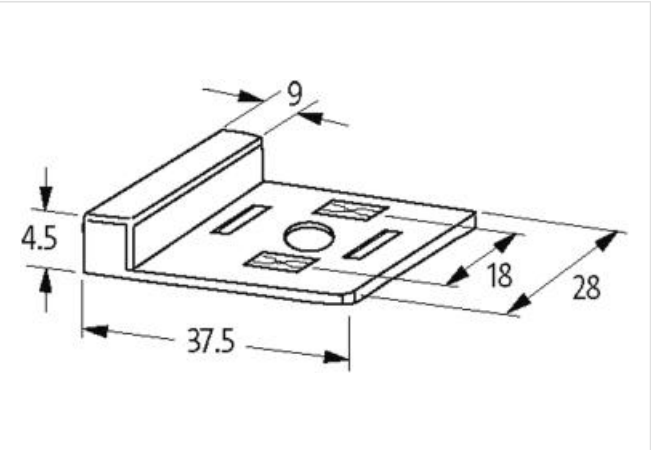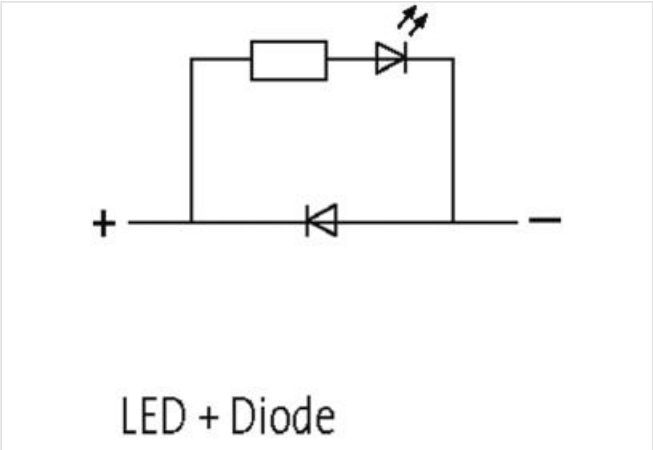

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371013 |
| ECLASS-6.1      | 27371013 |
| ECLASS-7.0      | 27371013 |
| ECLASS-8.0      | 27371013 |
| ECLASS-9.0      | 27371013 |
| ECLASS-10.1     | 27371013 |

|                                                 |               |
|-------------------------------------------------|---------------|
| ECLASS-11.1                                     | 27371013      |
| ECLASS-12.0                                     | 27371013      |
| ETIM-5.0                                        | EC000197      |
| customs tariff number                           | 85363010      |
| GTIN                                            | 4048879011310 |
| Packaging unit                                  | 1             |
| <b>Electrical data</b>                          |               |
| Capacity CX                                     | 200 ms        |
| Holding power max.                              | 60 W          |
| <b>Electrical data   Supply</b>                 |               |
| Cut-off peak voltage max.                       | 1 V           |
| <b>Electrical data   Input</b>                  |               |
| Input voltage AC min.                           | 20 V          |
| Input voltage AC max.                           | 27 V          |
| Input voltage DC min.                           | 20 V          |
| Input voltage DC max.                           | 27 V          |
| <b>Diagnostics</b>                              |               |
| Status indication LED                           | yellow        |
| <b>Installation</b>                             |               |
| Type of contact                                 | A             |
| Contact distance                                | 18 mm         |
| <b>Mechanical data   Material data</b>          |               |
| Coating contact                                 | silver-plated |
| Material housing                                | PUR           |
| Material contact                                | Bronze        |
| <b>Mechanical data   Mounting data</b>          |               |
| Height                                          | 4,5 mm        |
| Width                                           | 37,5 mm       |
| Depth                                           | 28 mm         |
| <b>Environmental characteristics   Climatic</b> |               |
| Operating temperature min.                      | -20 °C        |
| Operating temperature max.                      | 60 °C         |