


Modlink MSDD set contains:Frame 4000-68512-0000003

Insert 4000-68000-4620004

Link to Product

Illustration

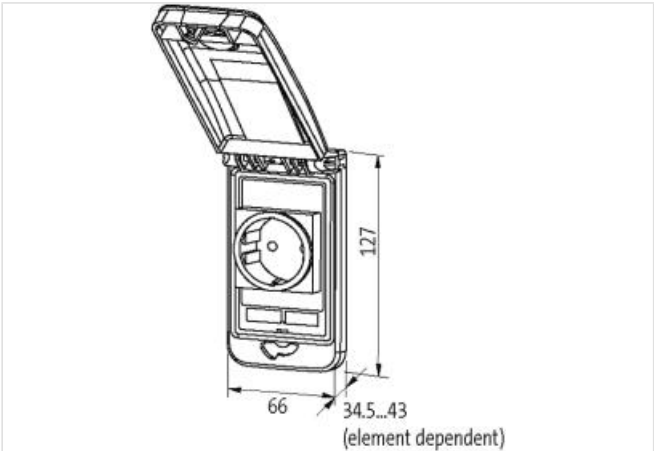

Product may differ from Image



Commercial data	
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
customs tariff number	85366990

GTIN 4048879862660

Packaging unit 1

Frame

Degree of protection (EN IEC 60529) IP65

Operating temperature min. -30 °C

Operating temperature max. 70 °C

Storage temperature min. -30 °C

Storage temperature max. 80 °C

Suitable for installation wall thickness min. 1 mm

Suitable for installation wall thickness max. 5 mm

Color cover transparent

Color housing black

Material lid PC

Material housing PA

Shielding plate

Connection information Threaded hole M4

Tightening torque 0,9 Nm

Germany (VDE)

Connection cross section max. 2,5 mm²

AWG number max. 14

Operating voltage AC 250 V

Operating current min. 10 A

Operating current max. 16 A

Connection Spring clamp terminals FK

No. of poles 2 + PE

Connections per pole 2

Protection contact present yes

RJ45

Operating voltage AC max. (UL-listed) 30 V

Operating voltage DC max. (UL-listed) 42,4 V

Current operating max. (UL) 175 mA

Family construction form RJ45

Family type Back side RJ45

Cable category min. Cat5e

Looking techniques Snap-in connector