




SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

230V LED+VDR M16x1.5

Form B (10 mm)  
230 V AC/DC  $\pm 10\%$   
LED and VDR  
metric  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

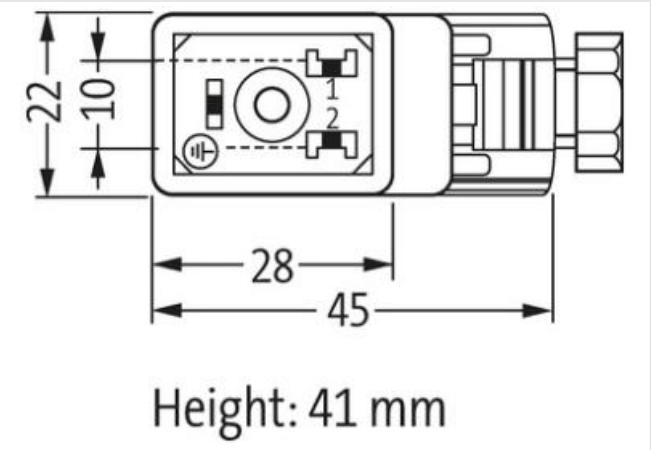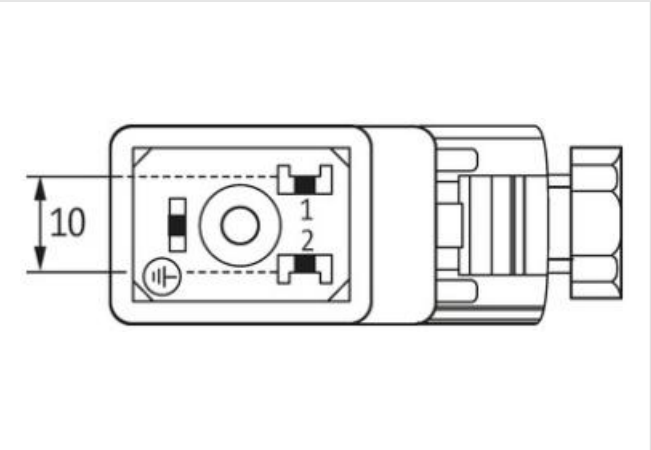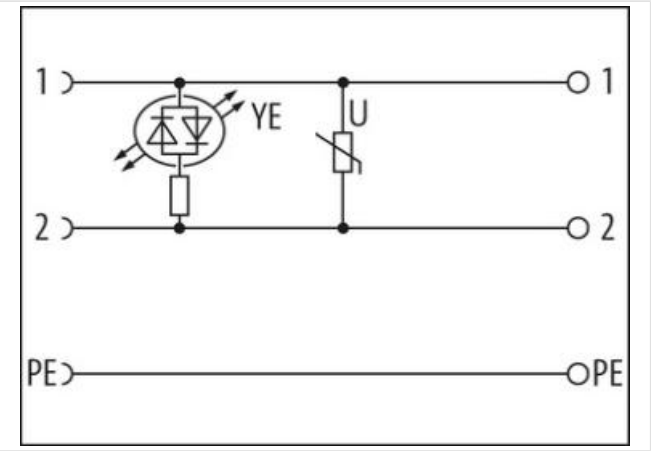

Product may differ from Image

Side 1	
Degree of protection (EN IEC 60529)	IP65
Commercial data	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN	4048879187275
------	---------------

Packaging unit	1
----------------	---

#### Electrical data

Capacity CX	15 ms
-------------	-------

Holding power max.	100 W
--------------------	-------

#### Electrical data | Supply

Operating voltage AC	230 V
----------------------	-------

Operating voltage AC min.	207 V
---------------------------	-------

Operating voltage AC max.	253 V
---------------------------	-------

Operating voltage DC	230 V
----------------------	-------

Operating voltage DC min.	207 V
---------------------------	-------

Operating voltage DC max.	253 V
---------------------------	-------

Cut-off peak voltage max.	450 V
---------------------------	-------

Current operating per contact max.	1 A
------------------------------------	-----

Current consumption max.	12 mA
--------------------------	-------

#### Diagnostics

Status indication LED	yellow
-----------------------	--------

#### Installation

Connection cross section max.	1,5 mm <sup>2</sup>
-------------------------------	---------------------

#### Installation | Connection

Tightening torque	0,4 Nm
-------------------	--------

Mounting set	M16 x 1.5
--------------	-----------

#### Device protection | Electrical

Additional condition protection degree	inserted, locked, with screw connection
--	---

#### Mechanical data | Mounting data

fastening screw	M3
-----------------	----

Clamping range min.	5 mm
---------------------	------

Clamping range max.	10 mm
---------------------	-------

#### Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------