

SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE




230V LED+VDR PG9

Form BI (11 mm)
230 V AC/DC ±10%
LED and RC
PG9

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

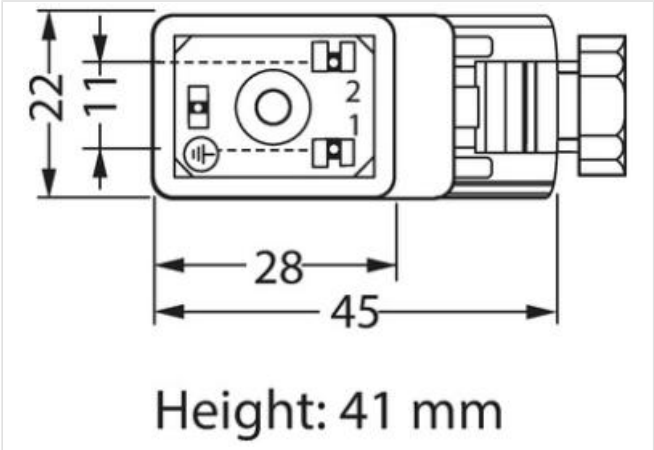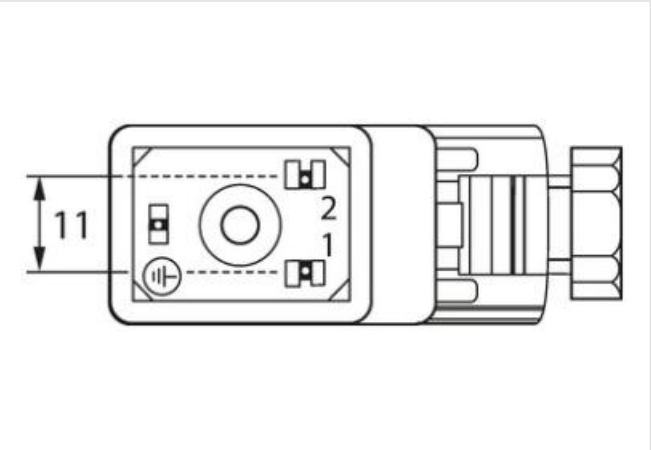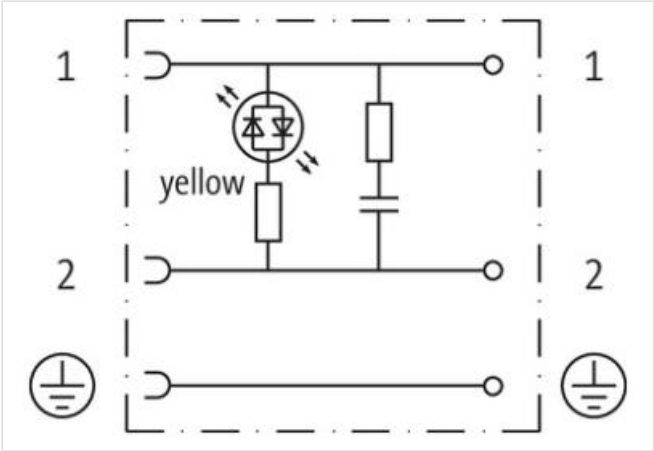

Product may differ from Image

Side 1

Degree of protection (EN IEC 60529) IP65

Commercial data

| | |
|-----------------------|----------|
| ECLASS-6.0 | 27279221 |
| ECLASS-7.0 | 27440104 |
| ECLASS-8.0 | 27440104 |
| ECLASS-9.0 | 27440102 |
| ETIM-5.0 | EC002062 |
| customs tariff number | 85366990 |

| | |
|---|---|
| GTIN | 4048879187060 |
| Packaging unit | 1 |
| Electrical data | |
| Capacity CX | 15 ms |
| Holding power max. | 50 W |
| Electrical data Supply | |
| Operating voltage AC | 230 V |
| Operating voltage AC min. | 207 V |
| Operating voltage AC max. | 253 V |
| Operating voltage DC | 230 V |
| Operating voltage DC min. | 207 V |
| Operating voltage DC max. | 253 V |
| Cut-off peak voltage max. | 450 V |
| Current consumption max. | 12 mA |
| Diagnostics | |
| Status indication LED | yellow |
| Installation | |
| Connection cross section max. | 1,5 mm ² |
| Installation Connection | |
| Tightening torque | 0,4 Nm |
| Mounting set | M3 |
| Device protection Electrical | |
| Additional condition protection degree | inserted, locked, with screw connection |
| Mechanical data Mounting data | |
| Mounting method | PG9 |
| Clamping range min. | 6 mm |
| Clamping range max. | 8 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |