
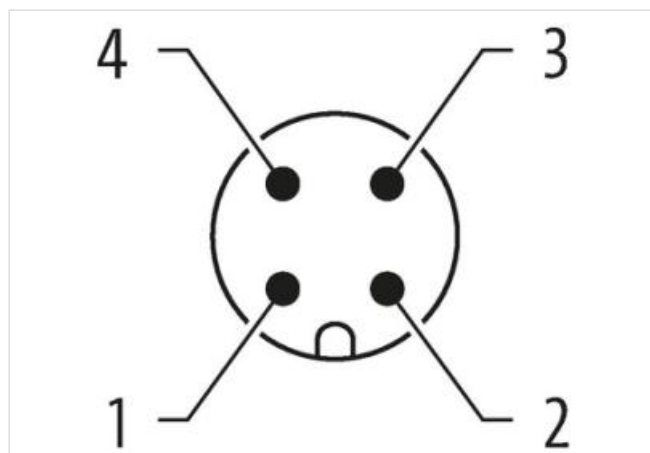
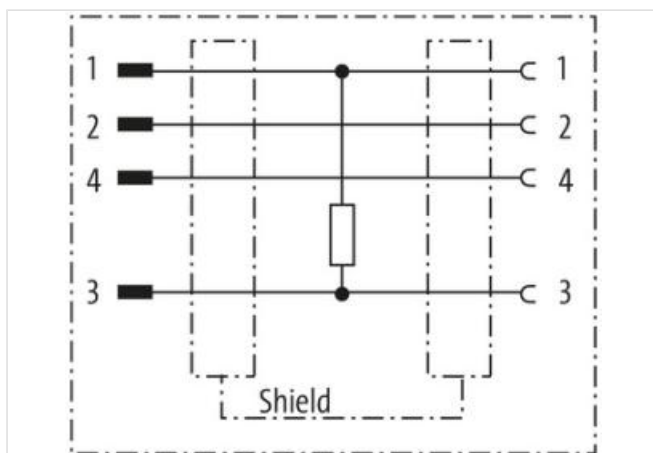


**Adaptor M12 male / M12 female A-cod. shielded**

4-pol., Cube67 resist.-adjust.

Adapter  
Male - female  
M12 – M12, 4-pole  
shielded

[Link to Product](#)**Illustration**

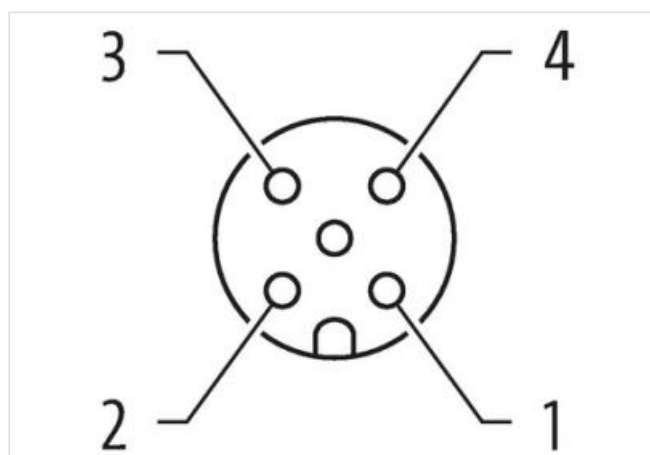

Product may differ from Image



| Commercial data                        |                                       |
|--|---------------------------------------|
| ECLASS-6.0                             | 27143423                              |
| ECLASS-6.1                             | 27260702                              |
| ECLASS-7.0                             | 27440102                              |
| ECLASS-8.0                             | 27440102                              |
| ECLASS-9.0                             | 27440106                              |
| ECLASS-10.1                            | 27440102                              |
| ECLASS-11.1                            | 27440102                              |
| ECLASS-12.0                            | 27440106                              |
| ETIM-5.0                               | EC001855                              |
| customs tariff number                  | 85366990                              |
| GTIN                                   | 4048879416009                         |
| Packaging unit                         | 1                                     |
| Electrical data   Supply               |                                       |
| Operating voltage AC max.              | 30 V                                  |
| Operating voltage DC max.              | 30 V                                  |
| Operating voltage AC max. (UL-listed)  | 30 V                                  |
| Operating voltage DC max. (UL-listed)  | 30 V                                  |
| Current operating per contact max.     | 4 A                                   |
| Installation   Connection              |                                       |
| Tightening torque                      | 0,6 Nm                                |
| Mounting set                           | M12 x 1                               |
| Device protection   Electrical         |                                       |
| Degree of protection (EN IEC 60529)    | IP67                                  |
| Additional condition protection degree | inserted, screwed                     |
| Rated insulation voltage               | 800 V                                 |
| Mechanical data   Material data        |                                       |
| Coating locking                        | Nickeled                              |
| Material housing                       | PUR                                   |
| Locking material                       | Zinc die-casting                      |
| Mechanical data   Mounting data        |                                       |
| Mounting method                        | inserted, screwed, Shaking protection |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |   |
|------------------------|---|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |