

Adaptor M12 on top A-cod. / MSUD valve plug C-8mm

3-pol.

Adapter

Form C (8 mm) – M12, connector top entry

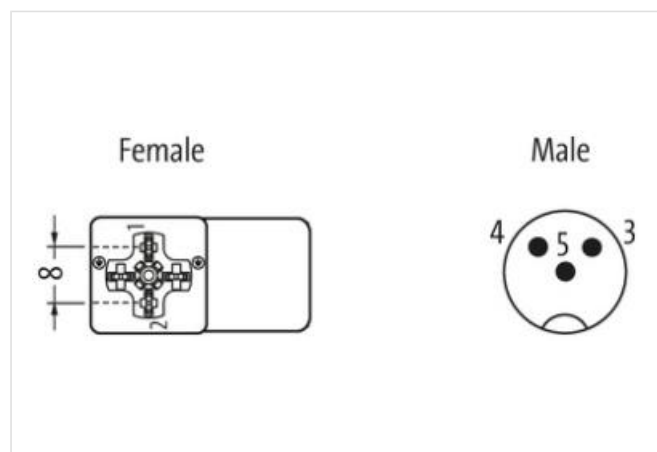
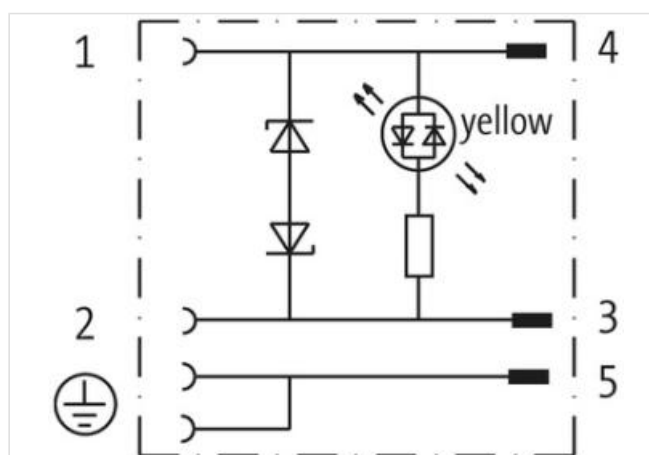
24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and suppression

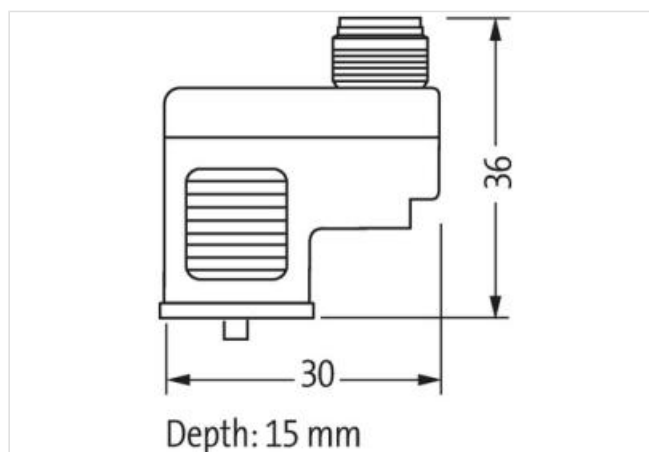
3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Tightening torque 0,4 Nm

Family construction form MSUD

Side 2

Tightening torque 0,6 Nm

Family construction form M12

Commercial data

ECLASS-6.0 27143423

ECLASS-6.1 27279221

ECLASS-7.0 27440104

ECLASS-8.0 27440104

ECLASS-9.0 27440106

ECLASS-10.1 27440106

ECLASS-11.1 27440106

ECLASS-12.0 27440106

ETIM-5.0 EC001855

customs tariff number 85366990

GTIN 4048879348706

Packaging unit 1

Electrical data | Supply

Operating voltage AC 24 V

Operating voltage AC min. 19,2 V

Operating voltage AC max. 28,8 V

Operating voltage DC 24 V

Operating voltage DC min. 18 V

Operating voltage DC max. 30 V

Cut-off peak voltage max. 55 V

Current operating per contact max. 4 A

Installation | Connection

Mounting set M3

Installation | Pin assignment

No. of poles 2 + PE

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67

Additional condition protection degree inserted, screwed

Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 85 °C

Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.