

**M8 male 90° / M12 female 90° A-cod.**

PVC 3x0.25 ye UL/CSA 0.6m

Male 90° – female 90°

M8 – M12, 3-pole


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

|   |    |   |
|---|----|---|
| 1 | BN | 1 |
|   |    | 2 |
| 3 | BU | 3 |
| 4 | BK | 4 |

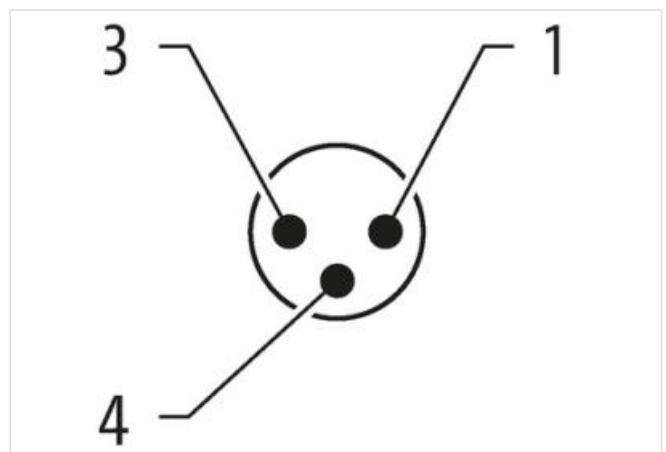



Product may differ from Image



Cable length 0,6 m

Side 1

Tightening torque 0,4 Nm  
Family construction form M8  
Thread M8 x 1  
suitable for corrugated tube (internal Ø) 6,5 mm  
Width across flats SW9

Side 2

Tightening torque 0,6 Nm  
Family construction form M12  
Thread M12 x 1  
suitable for corrugated tube (internal Ø) 10 mm  
Width across flats SW13

Commercial data

ECLASS-6.0 27279218  
ECLASS-7.0 27279218  
ECLASS-8.0 27279218  
ECLASS-9.0 27060311  
ECLASS-10.1 27060311  
ECLASS-11.1 27060311  
ECLASS-12.0 27060311  
ETIM-5.0 EC001855  
customs tariff number 85444290  
GTIN 4048879414494  
Packaging unit 1

Electrical data | Supply

Operating voltage AC max. 50 V  
Operating voltage DC max. 60 V  
Operating voltage AC (UL-listed) 30 V  
Operating voltage DC (UL-listed) 30 V  
Current operating per contact max. 4 A

Device protection | Electrical

|   |   |
|---|---|
| Degree of protection (EN IEC 60529)             | IP65, IP67, IP68, IP66K   |
| Additional condition protection degree          | inserted, screwed   |
| Pollution Degree                                | 3   |
| Rated surge voltage                             | 1,5 kV  |
| Material group (IEC 60664-1)                    | I   |
| <b>Mechanical data   Material data</b>          |   |
| Coating locking                                 | Nickeled  |
| Material housing                                | PUR   |
| Locking material                                | Zinc die-casting  |
| <b>Mechanical data   Mounting data</b>          |   |
| Mounting method                                 | inserted, screwed, Shaking protection   |
| <b>Environmental characteristics   Climatic</b> |   |
| Operating temperature min.                      | -25 °C  |
| Operating temperature max.                      | 85 °C   |
| Additional condition temperature range          | depending on cable quality  |
| <b>Important installation notes</b>             |   |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| <b>Conformity</b>                               |   |
| Product standard                                | DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8)   |
| <b>Installation   Cable</b>                     |   |
| Cable identification                            | 010   |
| Cable Type                                      | 1   |
| Jacket Color                                    | yellow  |
| Type of Certificate                             | cURus   |
| Amount stranding                                | 1   |
| Stranding                                       | 3 wires twisted   |
| wire arrangement                                | brown, black, blue  |
| Cable weight                                    | 29,37 g/m   |
| Material jacket                                 | PVC   |
| Shore hardness jacket                           | 85 ± 5 Shore A  |
| Freedom from ingredients (jacket)               | lead-free, cadmium-free, CFC-free, silicone-free  |
| Outer-diameter (jacket)                         | 4,5 mm  |
| Tolerance outer diameter (sheath)               | ± 5 %   |
| Material wire insulation                        | PVC   |
| Amount wires                                    | 3   |
| Outer diameter insulation                       | 1,25 mm   |
| Outer diameter tolerance core insulation        | ± 5 %   |
| Shore hardness wire insulation                  | 45 ± 5 Shore D  |
| Material properties wire insulation             | good machinability  |
| Ingredient freeness wire insulation             | lead-free, cadmium-free, CFC-free, silicone-free  |
| Amount strands (wire)                           | 14  |
| Diameter of single wires                        | 0,15 mm   |
| Conductor crosssection (wire)                   | 0,25 mm²  |
| Material conductor wire                         | Stranded copper wire, bare  |
| Conductor type (wire)                           | Strand class 5  |
| Nominal voltage AC max.                         | 300 V   |
| Current load capacity (standard)                | to DIN VDE 0298-4   |
| Current load capacity min. wire                 | 4,5 A   |
| Electrical resistance line constant wire        | 79 Ω/km @ 20 °C   |
| AC withstand voltage (wire - wire)              | 2 kV @ 60 s   |

|   |  |
|---|--|
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s  |
| Min. operating temperature (static)               | -30 °C   |
| Max. operating temperature (fixed)                | 80 °C  |
| Operating temperature min. (dynamic)              | -5 °C  |
| Operating temperature max. (dynamic)              | 80 °C  |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |