

Wall bushing for push pull power

With spring-cage connection, flexible coding


Push Pull Power metal mounting frame  
incl. contact insert with spring clamp connection  
flexible coding  
Suitable for rectangular mounting cut-out  
with gasket  
without fixing screws

Link to Product

Illustration



Product may differ from Image

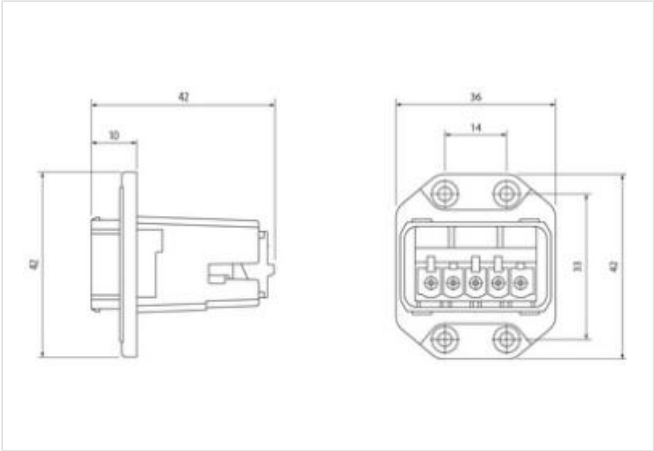

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440210
ECLASS-11.1	27440210
ECLASS-12.0	27440210
ETIM-5.0	EC002635
customs tariff number	85366990
GTIN	4048879900454
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Operating current	16 A

Installation

Connection cross section min.	0,75 mm²
Connection cross section max.	2,5 mm²
AWG number min.	18

AWG number max. 13

**Installation | Connection**

Connection Spring clamp terminals FK

Mating cycles min. 100

**Device protection | Electrical**

Degree of protection (EN IEC 60529) IP65, IP67

Additional condition protection degree inserted, screwed

Pollution Degree 2

Rated surge voltage 4 kV

**Mechanical data | Material data**

Coating housing nickel plated

Combustibility class (UL94) V-0

Material housing Zinc die-casting

**Mechanical data | Mounting data**

Mounting method 5-pole, PPP

**Environmental characteristics | Climatic**

Operating temperature min. -40 °C

Operating temperature max. 70 °C