


B10 Hood, IP68

Screw locking, side entry M32

B10  
Hood  
Screw locking  
IP68  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration

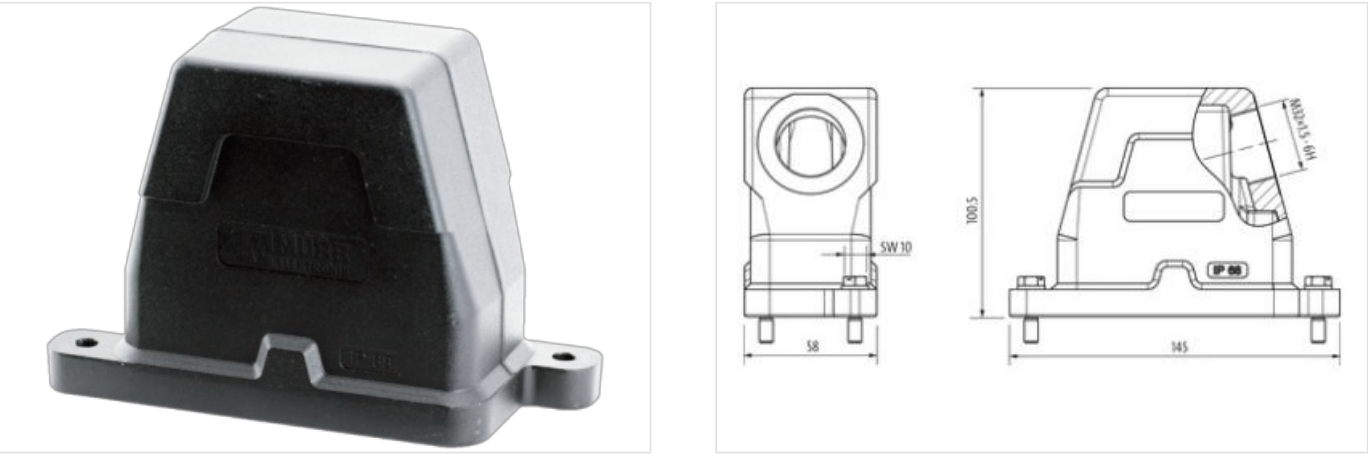

Product may differ from Image

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879647397 |
| Packaging unit        | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |      |
|--------------------|------|
| Tightening torque  | 4 Nm |
| Mounting set       | M32  |
| Mating cycles min. | 500  |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP68                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Hood

**Mechanical data | Material data**

|                  |                      |
|------------------|----------------------|
| Coating housing  | powder-coated        |
| Material gasket  | Silicon              |
| Material housing | Aluminum die casting |
| Locking material | Stainless steel      |

**Mechanical data | Mounting data**

|                 |               |
|-----------------|---------------|
| Size            | B10           |
| Mounting method | Screw locking |
| Height          | 100,5 mm      |
| Width           | 58 mm         |
| Depth           | 145 mm        |

**Environmental characteristics | Climatic**

|                                    |           |
|------------------------------------|-----------|
| Operating temperature min.         | -40 °C    |
| Operating temperature max.         | 125 °C    |
| Climatic category (EN IEC 60068-1) | 40/125/21 |