

CAP WITH SPRING PLUG TERMINALS 21 POLE

Use with MVP12 / Exact12 UNIVERSAL

4-way distribution box M12, UNIVERSAL Spring clamp plug-in terminals Replaces identical product (Art.No. 277314)


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



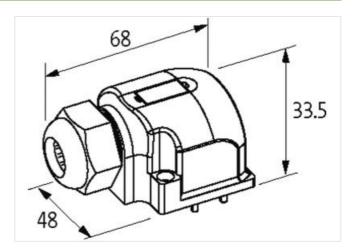



Product may differ from Image



Commercial data		
ECLASS-6.0	27143423	
ECLASS-6.1	27279219	
ECLASS-7.0	27279219	
ECLASS-8.0	27279219	
ECLASS-9.0	27440108	

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25



ECLASS-10.1	27440111	
ECLASS-11.1	27440111	
ECLASS-12.0	27440111	
ETIM-5.0	EC002585	
customs tariff number	85366990	
GTIN	4048879378529	
Packaging unit	1	
Electrical data Supply		
Total current max.	8 A	
Installation		
Connection cross section max.	1,5 mm²	
AWG number max.	16	
Installation Connection		
Connection	Spring clamp terminals FK	
Device protection Media		
Flame resistance	flame retardant	
Mechanical data Material data		
Material housing	Plastic	
Environmental characteristics Climatic		
Operating temperature min.	-20 °C	
Operating temperature max.	80 °C	
Connection type 2		
Family construction form	Сар	
No. of poles	21	
Family construction form	M12	
Gender	female	
Color contact carrier	black	
Coding	A	
No. of poles	5	