



Article discontinued since March/2018

Product discontinued

Compact design  
with plug relays  
8 plugged relays; each 1 NO/NC contact  
24 V DC  
Diode + LED

Link to Product

Illustration

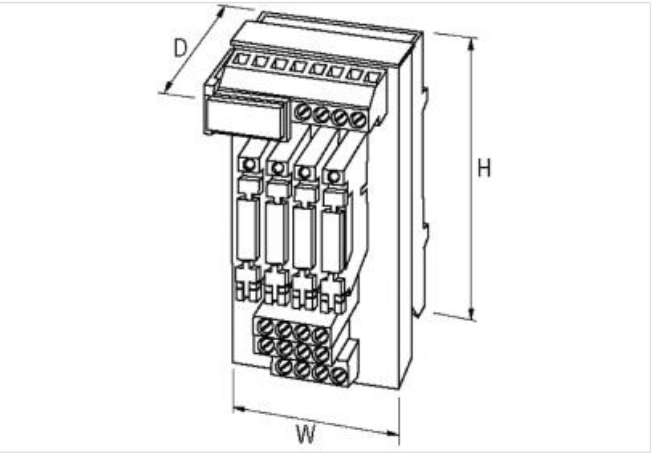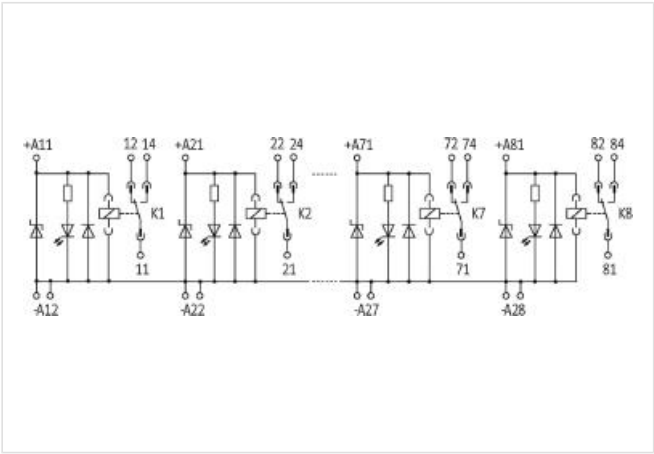

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371001 |
| ECLASS-7.0      | 27371001 |
| ECLASS-8.0      | 27371001 |
| ECLASS-9.0      | 27371001 |
| ETIM-5.0        | EC001437 |

|                       |               |
|-----------------------|---------------|
| customs tariff number | 85437090      |
| GTIN                  | 4048879411332 |
| Packaging unit        | 1             |

**Electrical data | Output**

|                                               |                                          |
|-----------------------------------------------|------------------------------------------|
| Utilization category AC-12 (EN IEC 60947-5-1) | 6 A @ 24, 6 A @ 110 V, 6 A @ 230 V       |
| Utilization category AC-15 (EN IEC 60947-5-1) | 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V     |
| Utilization category DC-13 (EN IEC 60947-5-1) | 1 A @ 24 V, 0,2 A @ 110 V, 0,1 A @ 230 V |
| Switching voltage AC max.                     | 250 V                                    |
| Switching voltage DC max.                     | 250 V                                    |
| Switching current max.                        | 6 A                                      |

**Installation**

|                               |                   |
|-------------------------------|-------------------|
| Connection cross section max. | 4 mm <sup>2</sup> |
|-------------------------------|-------------------|

**Installation | Connection**

|                        |                                          |
|------------------------|------------------------------------------|
| Connection             | Screw terminals SK                       |
| Connection information | mit einzeln ausgeführten -A2-Anschlüssen |

**Device protection | Electrical**

|                     |      |
|---------------------|------|
| Rated surge voltage | 4 kV |
|---------------------|------|

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 86 mm                     |
| Width                      | 67,5 mm                   |
| Depth                      | 75 mm                     |